


32' x 40' OFFICE SMS-N-40-4W

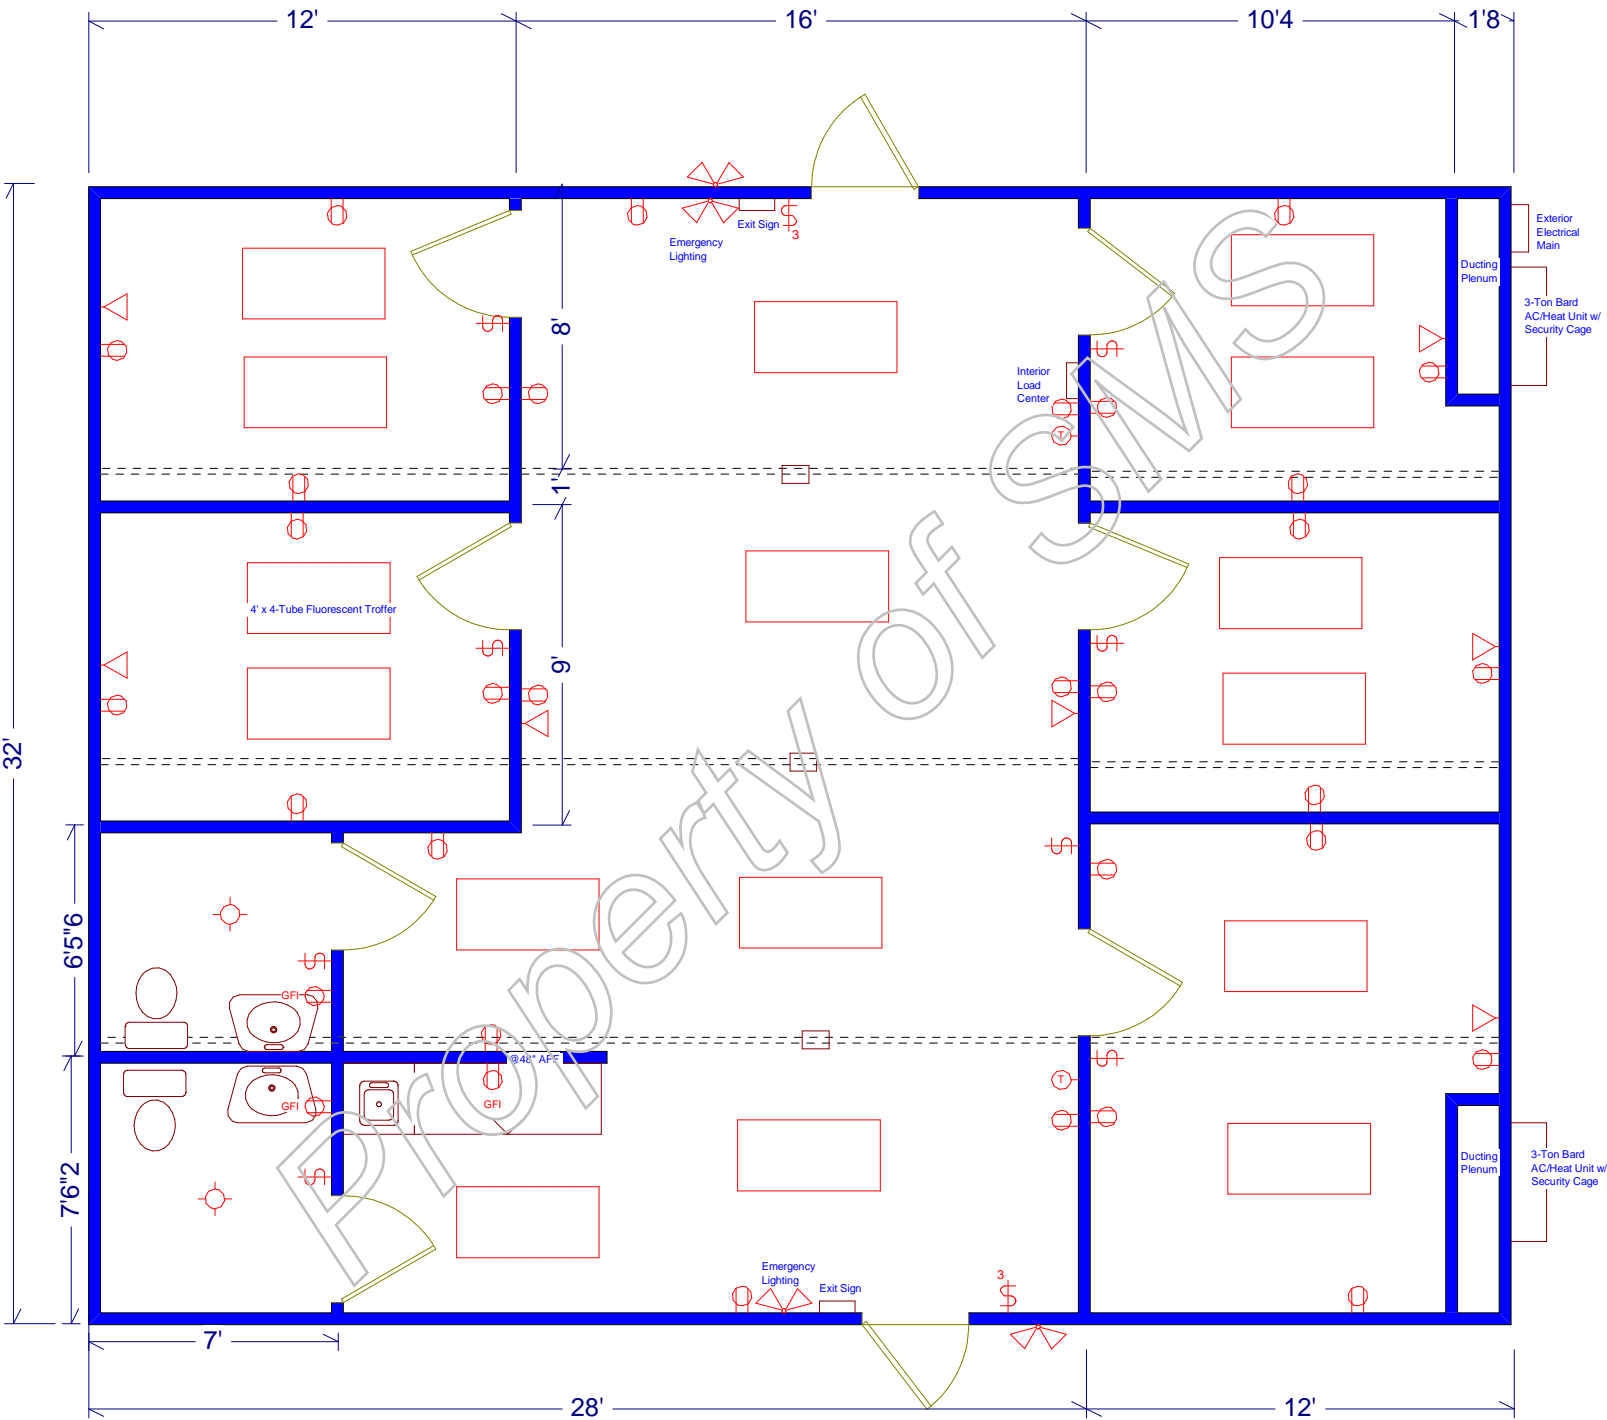

- 1.) Finished Interior To Consist Of: 1.5" Foam Insulation, Acoustic Ceiling, & VCT Flooring.
- 2.) Install 1" Spray Foam Under Floor
- 3.) (2) Restrooms, Coffee Bar w/Cabinets
- 4.) Central Ducting With Security Registers, Returns, & Thermostat
- 5.) Exit Signs On All Egress Doors A & C
- 6.) Replace Original Cargo doors w/ 16-Gauge Steel